

## P4SMA Series

### Description


The P4SMA series is designed specifically to protect sensitive electronic equipment from voltage transients induced by lightning and other transient voltage events. They have excellent clamping capability, high surge capability, low zener impedance and fast response time. The P4SMA series is supplied in YINT Semiconductor's exclusive, cost-effective, highly reliable and is ideally suited for use in communication systems, automotive, numerical controls, process controls, medical equipment, business machines, power supplies and many other industrial/consumer Applications.

### Features

- Case: DO-214AC(SMA)
- Excellent clamping capability
- 400 W peak pulse power capability with a 10/1000  $\mu$ s waveform
- Typical failure mode is a short circuit condition for current events exceeding component rating
- Fast response time: typically less than 1.0ps from 0 Volts to VB min.
- IEC61000-4-2 (ESD)  $\pm$ 30kV (air),  $\pm$ 30kV (contact).



### Functional Diagram

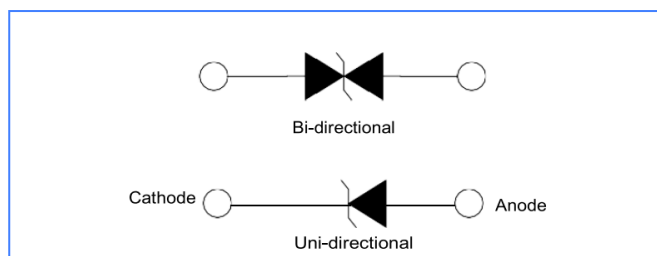

### Applications

TVS devices are ideal for the transient voltage clamp protection of I/O Interfaces, DC power line bus and other circuits used in Telecom, Computer, Industrial and Consumer electronic applications.

### Maximum Ratings (TA=25°C unless otherwise noted)

Parameter	Symbol	Value	Unit
Peak Pulse Power Dissipation at TA=25°C by 10/1000 $\mu$ s Waveform	P <sub>PK</sub>	400	W
Power Dissipation on Infinite Heat Sink at T <sub>L</sub> =50°C	P <sub>D</sub>	3.3	W
Peak Forward Surge Current, 8.3ms Single Half Sine Wave <sup>1</sup>	I <sub>FSM</sub>	60	A
Maximum Instantaneous Forward Voltage at 50A for Unidirectional Only <sup>2</sup>	V <sub>F</sub>	3.5/5	V
Operating Temperature Range	T <sub>J</sub>	-55 to +150	°C
Storage Temperature Range	T <sub>STG</sub>	-55 to +150	°C

#### NOTES:


1. Measured on 8.3ms single half sine wave or equivalent square wave for unidirectional device only, duty cycle=4 per minute maximum.
2. V<sub>F</sub> < 3.5V for single die parts and V<sub>F</sub> < 5.0V for stacked-die parts.

**Electrical characteristics (TA = 25 °C unless otherwise noted)**

Part Number (Bi)	Part Number (Uni)	MARKING		Reverse Stand off Voltage $V_R$ (Volts)	Breakdown Voltage $V_{BR}$ (Volts)@ $I_T$		Test Current $I_T$ (mA)	Maximum Reverse Leakage $I_R$ @ $V_R$ ( $\mu$ A)	Maximum Peak Pulse Current $I_{pp}$ (A)	Maximum Clamping Voltage $V_C$ @ $I_{pp}$ (V)
		BI	UNI		Min .V	Max .V				
P4SMA6.8CA	P4SMA6.8A	6V8C	6V8A	5.8	6.46	7.14	10	1000	38.10	10.5
P4SMA7.5CA	P4SMA7.5A	7V5C	7V5A	6.4	7.13	7.88	10	500	35.40	11.3
P4SMA8.2CA	P4SMA8.2A	8V2C	8V2A	7.0	7.79	8.61	10	200	33.06	12.1
P4SMA9.1CA	P4SMA9.1A	9V1C	9V1A	7.8	8.65	9.56	1	50	29.85	13.4
P4SMA10CA	P4SMA10A	10C	10A	8.6	9.50	10.50	1	10	27.59	14.5
P4SMA11CA	P4SMA11A	11C	11A	9.4	10.45	11.55	1	5	25.64	15.6
P4SMA12CA	P4SMA12A	12C	12A	10.2	11.40	12.60	1	5	23.95	16.7
P4SMA13CA	P4SMA13A	13C	13A	11.1	12.35	13.65	1	1	21.98	18.2
P4SMA15CA	P4SMA15A	15C	15A	12.8	14.25	15.75	1	1	18.87	21.2
P4SMA16CA	P4SMA16A	16C	16A	13.6	15.20	16.80	1	1	17.78	22.5
P4SMA18CA	P4SMA18A	18C	18A	15.3	17.10	18.90	1	1	15.87	25.2
P4SMA20CA	P4SMA20A	20C	20A	17.1	19.00	21.00	1	1	14.44	27.7
P4SMA22CA	P4SMA22A	22C	22A	18.8	20.90	23.10	1	1	13.07	30.6
P4SMA24CA	P4SMA24A	24C	24A	20.5	22.80	25.20	1	1	12.05	33.2
P4SMA27CA	P4SMA27A	27C	27A	23.1	25.65	28.35	1	1	10.67	37.5
P4SMA30CA	P4SMA30A	30C	30A	25.6	28.50	31.50	1	1	37.5	41.4
P4SMA33CA	P4SMA33A	33C	33A	28.2	31.35	34.65	1	1	8.75	45.7
P4SMA36CA	P4SMA36A	36C	36A	30.8	34.20	37.80	1	1	8.02	49.9
P4SMA39CA	P4SMA39A	39C	39A	33.3	37.05	40.95	1	1	7.42	53.9
P4SMA43CA	P4SMA43A	43C	43A	36.8	40.85	45.15	1	1	6.75	59.3
P4SMA47CA	P4SMA47A	47C	47A	40.2	44.65	49.35	1	1	6.17	64.8
P4SMA51CA	P4SMA51A	51C	51A	43.6	48.45	53.55	1	1	5.71	70.1
P4SMA56CA	P4SMA56A	56C	56A	47.8	53.20	58.80	1	1	5.19	77.0
P4SMA62CA	P4SMA62A	62C	62A	53.0	58.90	65.10	1	1	4.71	85.0
P4SMA68CA	P4SMA68A	68C	68A	58.1	64.60	71.40	1	1	4.35	92.0
P4SMA75CA	P4SMA75A	75C	75A	64.1	71.25	78.75	1	1	3.88	103.0
P4SMA82CA	P4SMA82A	82C	82A	70.1	77.90	86.10	1	1	3.54	113.0
P4SMA91CA	P4SMA91A	91C	91A	77.8	86.45	95.55	1	1	3.20	125.0
P4SMA100CA	P4SMA100A	100C	100A	85.5	95.00	105.0	1	1	2.92	137.0
P4SMA110CA	P4SMA110A	110C	110A	94.0	104.5	115.5	1	1	2.63	152.0
P4SMA120CA	P4SMA120A	120C	120A	102.0	114.0	126.0	1	1	2.42	165.0
P4SMA130CA	P4SMA130A	130C	130A	111.0	123.5	136.5	1	1	2.23	179.0
P4SMA150CA	P4SMA150A	150C	150A	128.0	142.5	157.5	1	1	1.93	207.0
P4SMA160CA	P4SMA160A	160C	160A	136.0	152.0	168.0	1	1	1.83	219.0





P4SMA170CA	P4SMA170A	170C	170A	145.0	161.5	178.5	1	1	1.71	234.0
P4SMA180CA	P4SMA180A	180C	180A	154.0	171.0	189.0	1	1	1.63	246.0
P4SMA200CA	P4SMA200A	200C	200A	171.0	190.0	210.0	1	1	1.46	274.0
P4SMA220CA	P4SMA220A	220C	220A	185.0	209.0	231.0	1	1	1.22	328.0
P4SMA250CA	P4SMA250A	250C	250A	214.0	237.5	262.5	1	1	1.16	344.0
P4SMA300CA	P4SMA300A	300C	300A	256.0	285.0	315.0	1	1	0.97	414.0
P4SMA350CA	P4SMA350A	350C	350A	299.3	332.5	367.5	1	1	0.83	482.0
P4SMA400CA	P4SMA400A	400C	400A	342.0	380.0	420.0	1	1	0.72	552.0
P4SMA440CA	P4SMA440A	440C	440A	376.2	418.0	462.0	1	1	0.66	607.2

**I-V Curve characteristics**

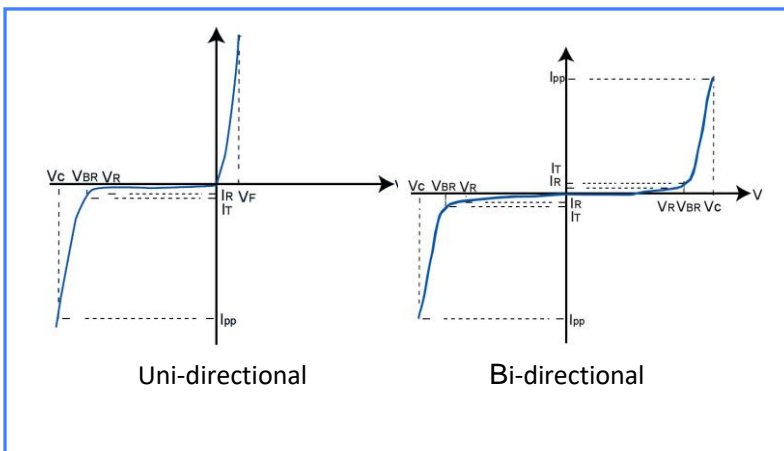


Symbol	Parameter
$I_{PP}$	Maximum Reverse Peak Pulse Current
$V_C$	Clamping Voltage @ $I_{PP}$
$V_{RWM}$	Working Peak Reverse Voltage
$I_R$	Maximum Reverse Leakage Current @ $V_{RWM}$
$V_{BR}$	Breakdown Voltage @ $I_T$ (Test Current)

**Rating & Characteristic Curves**

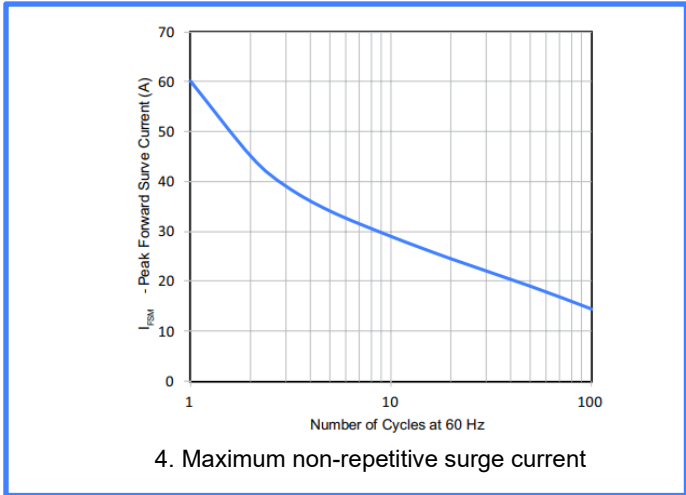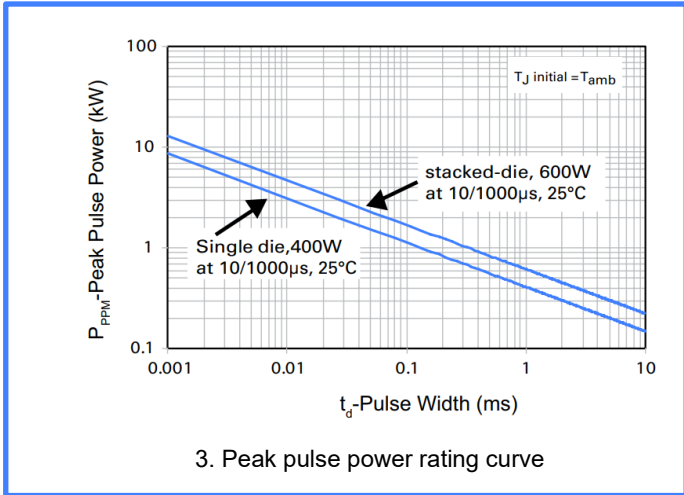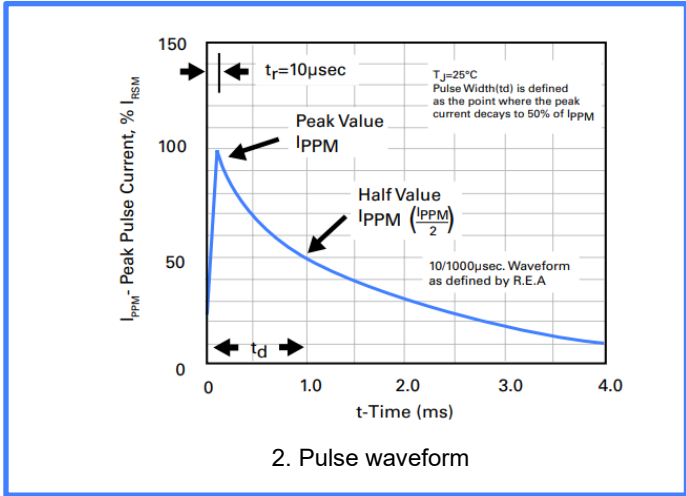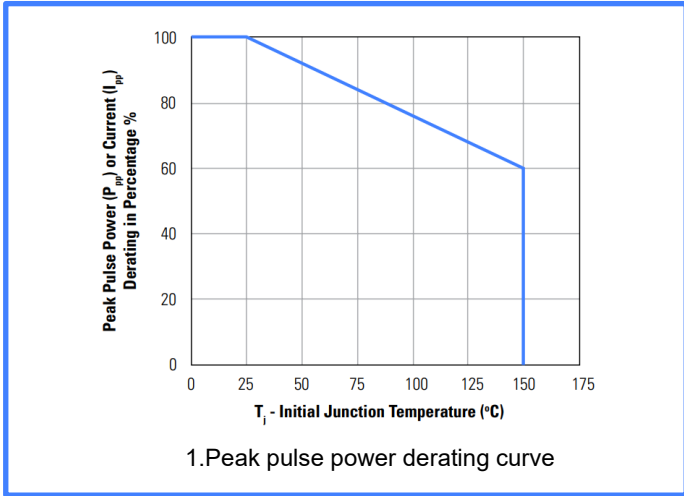


## Soldering parameters

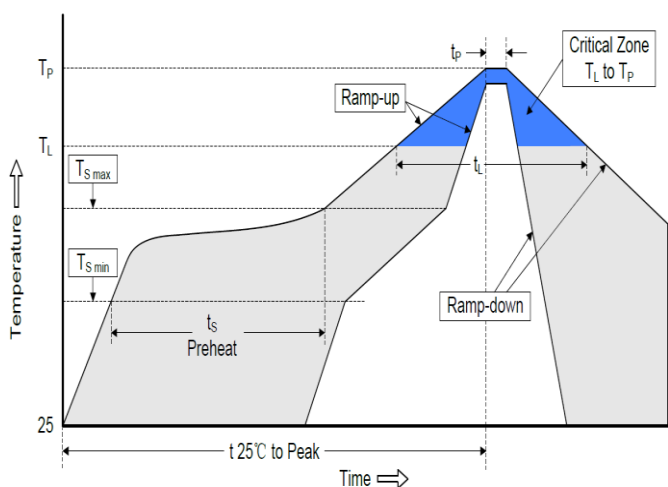

Profile Feature	Pb-Free Assembly
Average ramp-up rate ( $T_L$ to $T_P$ )	3°C/second max.
Preheat	
-Temperature Min ( $T_{S\ min}$ )	150°C
-Temperature Max ( $T_{S\ max}$ )	200°C
-Time (min to max)( $t_s$ )	60-180 seconds
$T_{S\ max}$ to $T_L$	
-Ramp-up Rate	3°C/second max.
Time maintained above:	
- Temperature ( $T_L$ )	217°C
- Time ( $t_L$ )	60-150 seconds
Peak Temperature ( $T_P$ )	260°C
Time within 5°C of actual Peak Temperature ( $t_p$ )	20-40 seconds
Ramp-down Rate	6°C /second max.
Time 25°C to Peak Temperature	8 minutes max.

## Package outline dimensions in millimeters


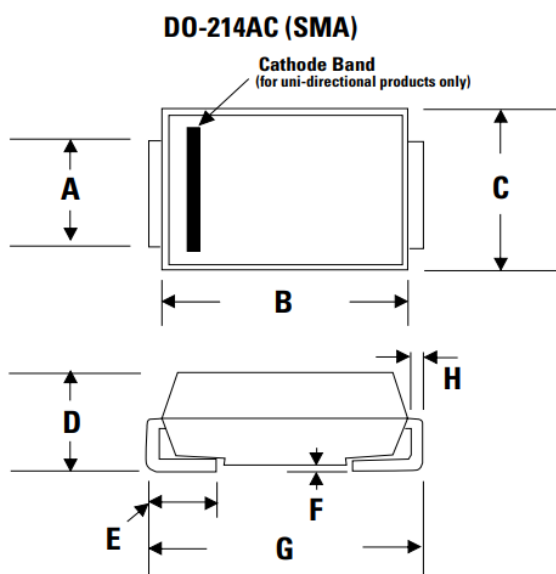


Dimensions	Millimeter	
	Min	Max
A	1.250	1.650
B	3.990	4.600
C	2.400	2.790
D	1.900	2.290
E	0.780	1.520
F	-	0.203
G	4.800	5.280
H	0.152	0.305
I	1.800	-
J	2.100	-
K	-	2.100
L	2.100	-

### Mounting Pad Layout



### Part number code & Marking code

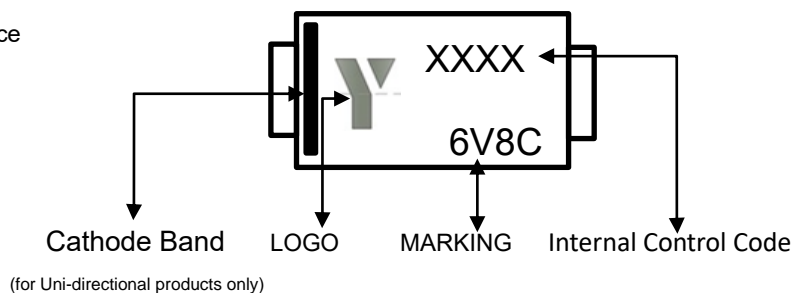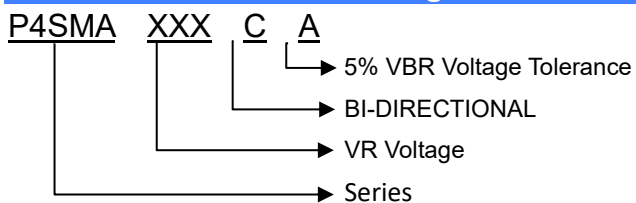

### Disclaimer

Specifications are subject to change without notice.

The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time.

Users should verify actual device performance in their specific applications.